




BT

TOOL HOLDERS

BT Taper Standard

BT 锥柄标准



Size	D	d1	d2	d3	d4	d5	d6	l1	l2	l3	l4	a	T
BT30	46	31.75	56.144	38	12.5	16.1	8	70.4	48.4	24	20	2	M12*1.75
BT40	63	44.45	75.679	53	17	16.	10	92.4	65.4	30	25	2	M16*2.0
BT50	100	69.85	119.019	85	25	25.7	15	139.8	101.8	45	35	3	M24*3.0

Taper standard: JIS B 6339

Material: Alloyed case hardened steel

Surface Treatment: Blackening and Bright

Taper tolerance: <AT3

Hardness: HRC 56-60

Carbon depth: 0.8±0.2mm

Surface Roughness: Ra<0.2μm

Balancing: G6.3/15000; G2.5/25000

Cooling: AD; AD/B can be made by request.

BT & BBT TOOLING SYSTEM

BT 工具系统




ER Collet Chuck.....	C.04
ER 弹簧夹头刀柄.....	C.04
GER Collet Chuck	C.09
GER 弹簧夹头刀柄.....	C.09
Power Milling Chuck	C.10
强力铣刀柄	C.10
OZ Collet Chuck.....	C.11
OZ 夹头刀柄.....	C.11
SKS Collet Chuck.....	C.12
SKS 高速筒夹刀柄.....	C.12
TG Collet Chuck	C.13
TG 超强力刀柄	C.13
Pull Back Collet Chuck	C.14
DC 后拉刀柄.....	C.14
Face Mill Holder.....	C.15
面铣刀柄.....	C.15
Combi Shell Mill Holder.....	C.19
混合插入式铣刀柄.....	C.19
End Mill Holder.....	C.20
侧固刀柄.....	C.20
Morse Taper Adapter.....	C.25
带扁尾莫氏刀柄.....	C.25
Morse Taper Adapter.....	C.25
带螺纹孔莫氏刀柄	C.25
Tool Holder Adapter Sleeve	C.26
转换刀柄.....	C.26
Drill Chuck Adapter.....	C.27
钻接杆	C.27
APU Drill Chuck Holder	C.27
APU 钻夹头刀柄.....	C.27
Precision Drill Chuck Holder.....	C.28
精密钻夹头刀柄	C.28
Quick Change Tapping Chuck.....	C.28
弹性快换攻丝刀柄	C.28
Screw-in Milling Cutter Holder.....	C.29
SOM 锁牙刀柄.....	C.29
Runout Adjustable Flange Adapter	C.31
可调节精度法兰刀柄	C.31
UM Adjustable.....	C.32
UM调零刀柄	C.32
Boring Bar Blank.....	C.33
基础柄	C.33
Test Arbor.....	C.33
主轴检测棒.....	C.33
Alignment Tool for ATC Arm	C.34
调整机械手用组合模具.....	C.34



BT

ER Collet Chuck with UM Nut

ER 弹簧夹头刀柄

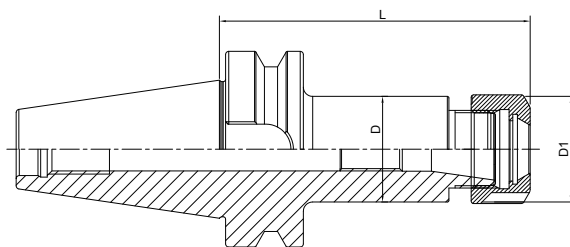




Size	D	D1	L	Capacity
BT30-ER16UM-70	28	32	70	1-10
BT30-ER20UM-70	34	35	70	1-13
BT30-ER25-70	42	42	70	2-16
BT30-ER32-70	40	50	70	2-20
BT30-ER40-70	50	63	70	3-26
BT30-ER16UM-100	28	32	100	1-10
BT30-ER20UM-100	34	35	100	1-13
BT30-ER25-100	42	42	100	2-16
BT30-ER32-100	40	50	100	2-20
BT40-ER16UM-70	28	32	70	1-10
BT40-ER20UM-70	34	35	70	1-13
BT40-ER25-70	42	42	70	2-16
BT40-ER32-70	50	50	70	2-20
BT40-ER40-80	50	63	80	3-26
BT40-ER16UM-100	28	32	100	1-10
BT40-ER20UM-100	34	35	100	1-13
BT40-ER25-100	42	42	100	2-16
BT40-ER32-100	50	50	100	2-20
BT40-ER40-100	50	63	100	3-26
BT40-ER16UM-160	28	32	160	1-10
BT40-ER20UM-160	34	35	160	1-13
BT40-ER25-160	42	42	160	2-16
BT40-ER32-160	50	50	160	2-20
BT40-ER40-160	50	63	160	3-26

AD/B Customized

AD/B 可定制

ER Collet Chuck with UM Nut ER 弹簧夹头刀柄

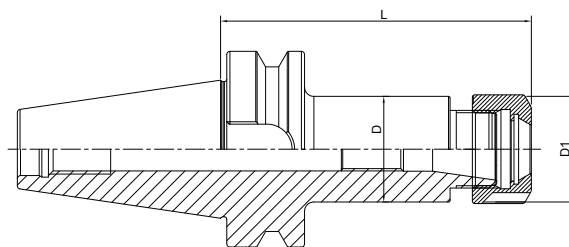




Size	D	D1	L	Capacity
BT40-ER16UM-200	28	32	200	1-10
BT40-ER20UM-200	34	35	200	1-13
BT40-ER25-200	42	42	200	2-16
BT40-ER32-200	50	50	200	2-20
BT40-ER40-200	50	63	200	3-26

AD/B Customized

AD/B 可定制

ER Collet Chuck with UM Nut

ER 弹簧夹头刀柄

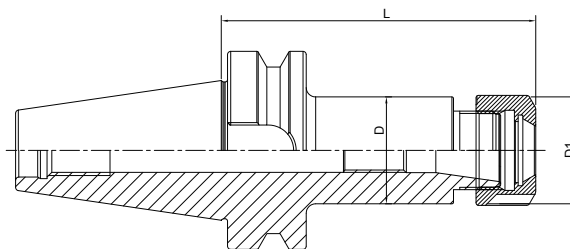




Size	D	D1	L	Capacity
BT50-ER16UM-70	28	32	70	1-10
BT50-ER20UM-70	34	35	70	1-13
BT50-ER25-70	42	42	70	2-16
BT50-ER32-70	40	50	70	2-20
BT50-ER40-80	63	63	80	3-26
BT50-ER50-100	64	78	100	6-34
BT50-ER16UM-100	28	32	100	1-10
BT50-ER20UM-100	34	35	100	1-13
BT50-ER25-100	42	42	100	2-16
BT50-ER32-100	50	50	100	2-20
BT50-ER40-100	63	63	100	3-26
BT50-ER16UM-160	28	32	160	1-10
BT50-ER20UM-160	34	35	160	1-13
BT50-ER25-160	42	42	160	2-16
BT50-ER32-160	50	50	160	2-20
BT50-ER40-160	63	63	160	3-26
BT50-ER16UM-200	28	32	200	1-10
BT50-ER20UM-200	34	35	200	1-13
BT50-ER25-200	42	42	200	2-16
BT50-ER32-200	50	50	200	2-20
BT50-ER40-200	63	63	200	3-26
BT50-ER25-250	42	42	250	2-16
BT50-ER32-250	50	50	250	2-20
BT50-ER40-250	63	63	250	3-26
BT50-ER25-300	42	42	300	2-16
BT50-ER32-300	50	50	300	2-20
BT50-ER40-300	63	63	300	3-26

AD/B Customized

AD/B 可定制

ER Collet Chuck with Hex Nut

ER 弹簧夹头刀柄

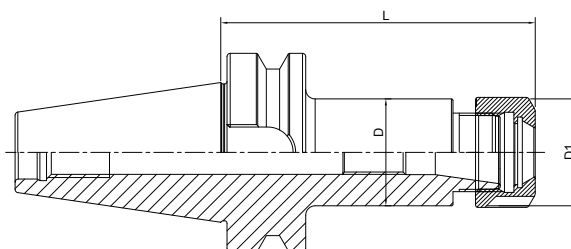

Size	D	D1	L	Capacity
BT30-ER16-70	28	28	70	1-10
BT30-ER20-70	34	34	70	1-13
BT30-ER16-100	28	28	100	1-10
BT30-ER20-100	34	34	100	1-13
BT40-ER16-70	28	28	70	1-10
BT40-ER20-70	34	34	70	1-13
BT40-ER16-100	28	28	100	1-10
BT40-ER20-100	34	34	100	1-13
BT40-ER16-160	28	28	160	1-10
BT40-ER20-160	34	34	160	1-13

RPM
G6.3/15000

Size	D	D1	L	Capacity
BT40-ER16-200T	28	28	200	1-10
BT40-ER20-200	34	34	200	1-13
BT50-ER16-70	28	28	70	1-10
BT50-ER20-70	34	34	70	1-13
BT50-ER16-100	28	28	100	1-10
BT50-ER20-100	34	34	100	1-13
BT50-ER16-160	28	28	160	1-10
BT50-ER20-160	34	34	160	1-13
BT50-ER16-200T	28	28	200	1-10
BT50-ER20-200	34	34	200	1-13




AD/B Customized
T refers to cutter side with taper design

AD/B 可定制
T 代表刀具端锥柄设计

BT

ER Collet Chuck with Mini Nut

ER 弹簧夹头刀柄

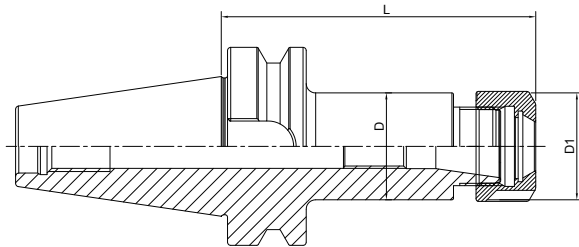

Size	D	D1	L	Capacity
BT30-ER11M-70	16	16	70	1-7
BT30-ER16M-70	22	22	70	1-10
BT40-ER11M-70	16	16	70	1-7
BT40-ER16M-70	22	22	70	1-10
BT40-ER20M-70	28	28	70	1-13
BT40-ER25M-70	35	35	70	2-16
BT40-ER11M-100	16	16	100	1-7
BT40-ER16M-100	22	22	100	1-10
BT40-ER20M-100	28	28	100	1-13
BT40-ER25M-100	35	35	100	2-16
BT40-ER11M-160T	16	16	160	1-7
BT40-ER16M-160T	22	22	160	1-10
BT40-ER20M-160	28	28	160	1-13
BT40-ER25M-160	35	35	160	2-16

RPM
G6.3/15000



Size	D	D1	L	Capacity
BT50-ER16M-100	22	22	100	1-10
BT50-ER20M-100	28	28	100	1-13
BT50-ER25M-100	35	35	100	2-16
BT50-ER16M-160T	22	22	160	1-10
BT50-ER20M-160	28	28	160	1-13
BT50-ER25M-160	35	35	160	2-16

AD/B Customized
T refers to cutter side with taper design

AD/B 可定制
T 代表刀具端锥柄设计

ER Collet Chuck with GER Nut

ER 弹簧夹头刀柄

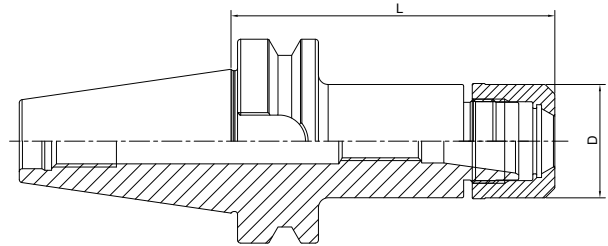

BT


Size	D1	L	Capacity
BT30-GER16-70	30	70	1-10
BT30-GER20-70	35	70	1-13
BT30-GER25-70	40	70	2-16
BT30-GER32-70	48	70	2-20
BT40-GER16-70	30	70	1-10
BT40-GER20-70	35	70	1-13
BT40-GER25-70	40	70	2-16
BT40-GER32-70	48	70	2-20
BT40-GER16-100	30	100	1-10
BT40-GER20-100	35	100	1-13
BT40-GER25-100	40	100	2-16
BT40-GER32-100	48	100	2-20
BT50-GER16-100	30	100	1-10
BT50-GER20-100	35	100	1-13
BT50-GER25-100	40	100	2-16
BT50-GER32-100	48	100	2-20

Power Milling Chuck

强力铣刀柄

A ↗
≤0.008




AD

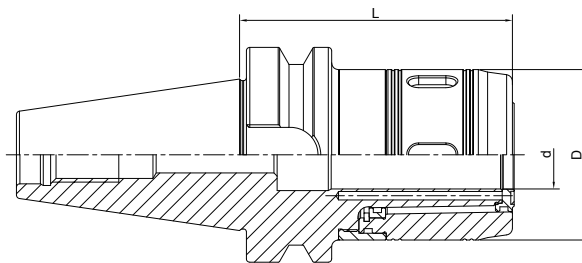

Size	d	D	L	Capacity
BT30-HC20-80	20	50	80	3-16; 20
BT30-HC25-90	25	59	90	3-20; 25
BT30-HC32-110	32	72	110	3-25; 32
BT40-HC20-90	20	50	90	3-16; 20
BT40-HC25-100	25	59	100	3-20; 25
BT40-HC32-90	32	72	90	3-25; 32
BT40-HC32-105	32	72	105	3-25; 32
BT40-HC32-165	32	72	165	3-25; 32
BT40-HC42-130	42	99	130	3-32; 42
BT50-HC20-105	20	50	105	3-16; 20
BT50-HC25-105	25	59	105	3-20; 25
BT50-HC32-110	32	72	110	3-25; 32
BT50-HC42-110	42	99	110	3-32; 42
BT50-HC32-165	32	72	165	3-25; 32
BT50-HC32-200	32	72	200	3-25; 32
BT50-HC32-250	32	72	250	3-25; 32
BT50-HC32-300	32	72	300	3-25; 32

OZ Collet Chuck

OZ 夹头刀柄

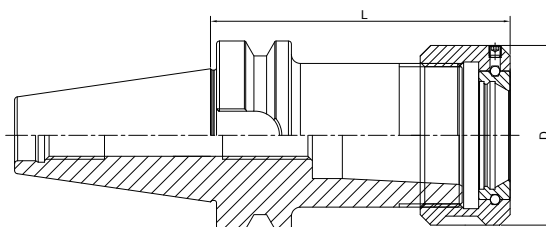

Size	D	L	Capacity
BT30-OZ16-70	43	70	3-16
BT30-OZ25-80	60	80	3-25
BT40-OZ16-70	43	70	3-16
BT40-OZ25-70	60	70	3-25
BT40-OZ32-80	72	80	6-32
BT50-OZ25-85	60	85	3-25
BT50-OZ32-90	72	90	6-32


High Speed SKS Collet Chuck

SKS 高速筒夹刀柄

A ↗
≤0.003

RPM
G2.5/25000

AD
AD

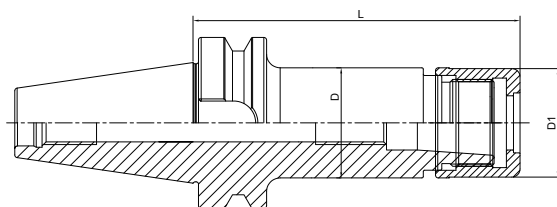

Size	D	D1	L	Capacity	M
BT30-SKS10-60	27.5	27.1	60	2-10	M21.5*1
BT30-SKS16-60	40.6	40	60	3-16	M32*1.5
BT30-SKS10-90	27.5	27.1	90	2-10	M21.5*1
BT30-SKS16-90	40.6	40	90	3-16	M32*1.5
BT40-SKS10-60	27.5	27.1	60	2-10	M21.5*1
BT40-SKS16-70	40.6	40	70	3-16	M32*1.5
BT40-SKS10-90	27.5	27.1	90	2-10	M21.5*1
BT40-SKS16-90	40.6	40	90	3-16	M32*1.5
BT40-SKS20-90	48.5	48	90	2-20	M40*1
BT40-SKS25-90	55.6	55	90	6-25	M45*1.5
BT40-SKS10-120	27.5	27.1	120	2-10	M21.5*1
BT40-SKS16-120	40.6	40	120	3-16	M32*1.5
BT40-SKS20-120	48.5	48	120	2-20	M40*1
BT40-SKS25-120	55.6	55	120	6-25	M45*1.5
BT50-SK10-100	27.5	27.1	100	2-10	M21.5*1
BT50-SK16-100	40.6	40	100	3-16	M32*1.5
BT50-SKS10-120	27.5	27.1	120	2-10	M21.5*1
BT50-SKS16-120	40.6	40	120	3-16	M32*1.5
BT50-SKS10-165	27.5	27.1	165	2-10	M21.5*1
BT50-SKS16-165	40.6	40	165	3-16	M32*1.5


TG Collet Chuck

TG 超强力刀柄

A ↗
≤0.005

RPM
G2.5/25000

AD

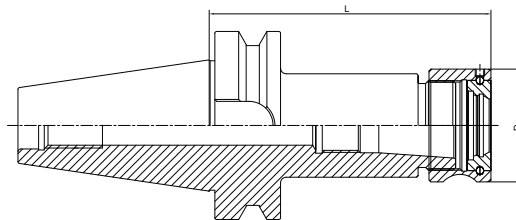

Size	D	L	Collet	Capacity
BT40-TG75-70	50	70	TG 75	2-20
BT40-TG100-80	60	80	TG 100	3-25
BT40-TG100-100	60	100	TG 100	3-25
BT40-TG100-150	60	150	TG 100	3-25
BT50-TG100-90	60	90	TG 100	3-25
BT50-TG100-150	60	150	TG 100	3-25


Pull Back Collet Chuck

DC 后拉刀柄

A ↗
≤0.003

RPM
G2.5/25000

AD

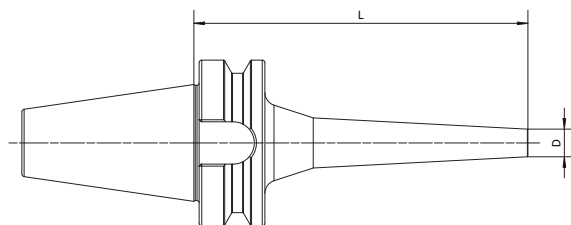

Size	L	D	Capacity
BT30-DC06-60	60	14	1-6
BT30-DC06-90	90	14	1-6
BT30-DC06-120	120	14	1-6
BT30-DC08-60	60	22	1-10
BT30-DC08-90	90	22	1-10
BT30-DC08-120	120	22	1-10
BT30-DC12-80	80	34	1-12
BT40-DC06-60	60	14	1-6
BT40-DC06-90	90	14	1-6
BT40-DC06-120	120	14	1-6
BT40-DC06-150	150	14	1-6
BT40-DC08-60	60	22	1-10
BT40-DC08-90	90	22	1-10
BT40-DC08-120	120	22	1-10
BT40-DC08-150	150	22	1-10
BT40-DC08-200	200	22	1-10
BT40-DC12-90	90	34	1-12
BT40-DC12-120	120	34	1-12
BT40-DC12-150	150	34	1-12
BT40-DC12-200	200	34	1-12
BT50-DC06-120	120	14	1-6
BT50-DC06-150	150	14	1-6
BT50-DC08-120	120	22	1-10
BT50-DC08-150	150	22	1-10
BT50-DC08-200	200	22	1-10
BT50-DC12-120	120	34	1-12
BT50-DC12-150	150	34	1-12
BT50-DC12-200	200	34	1-12


Face Mill Holder Inch

英制面铣刀柄

A ↗
≤0.005

RPM
G6.3/15000

AD




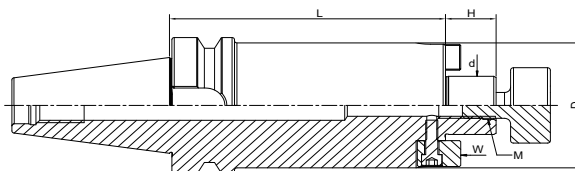


BT

Size	d	L	D	H	M
BT40-FMA3/4"-40	3/4"	40	42.926	17.45	3/8-24
BT40-FMA1"-40	1"	40	55.626	17.45	1/2-20
BT40-FMA1-1/4"-50	1-1/4"	50	69.85	17.45	5/8-18
BT40-FMA1-1/2"-50	1-1/2"	50	78	23.83	3/4-16
BT40-FMA3/4"-100	3/4"	100	42.926	17.45	3/8-24
BT40-FMA1"-100	1"	100	55.626	17.45	1/2-20
BT40-FMA1-1/4"-100	1-1/4"	100	69.85	17.45	5/8-18
BT40-FMA1-1/2"-100	1-1/2"	100	78	23.83	3/4-16
BT40-FMA3/4"-150	3/4"	150	42.926	17.45	3/8-24
BT40-FMA1"-150	1"	150	55.626	17.45	1/2-20
BT40-FMA1-1/4"-150	1-1/4"	150	69.85	17.45	5/8-18
BT40-FMA1-1/2"-150	1-1/2"	150	78	23.83	3/4-16
BT50-FMA3/4"-40	3/4"	40	42.926	17.45	3/8-24
BT50-FMA1"-40	1"	40	55.626	17.45	1/2-20
BT50-FMA1-1/4"-50	1-1/4"	50	69.85	17.45	5/8-18
BT50-FMA1-1/2"-50	1-1/2"	50	78	23.83	3/4-16
BT50-FMA3/4"-100	3/4"	100	42.926	17.45	3/8-24
BT50-FMA1"-100	1"	100	55.626	17.45	1/2-20
BT50-FMA1-1/4"-100	1-1/4"	100	69.85	17.45	5/8-18
BT50-FMA1-1/2"-100	1-1/2"	100	78	23.83	3/4-16
BT50-FMA3/4"-150	3/4"	150	42.926	17.45	3/8-24
BT50-FMA1"-150	1"	150	55.626	17.45	1/2-20
BT50-FMA1-1/4"-150	1-1/4"	150	69.85	17.45	5/8-18
BT50-FMA1-1/2"-150	1-1/2"	150	78	23.83	3/4-16

Face Mill Holder

面铣刀柄

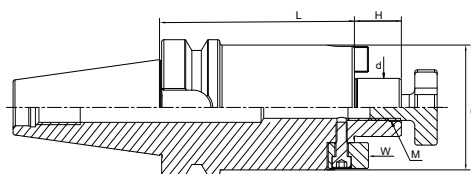




Size	d	L	D	H	M
BT30-FMB16-40	16	40	38	17	M8
BT30-FMB22-40	22	40	48	19	M10
BT30-FMB27-40	27	40	58	21	M12
BT30-FMB32-50	32	50	78	24	M16
BT40-FMB16-40	16	40	38	17	M8
BT40-FMB22-40	22	40	48	19	M10
BT40-FMB27-40	27	40	58	21	M12
BT40-FMB32-50	32	50	78	24	M16
BT40-FMB22-60	22	60	48	19	M10
BT40-FMB27-60	27	60	58	21	M12
BT40-FMB32-60	32	60	78	24	M16
BT40-FMB16-100	16	100	38	17	M8
BT40-FMB22-100	22	100	48	19	M10
BT40-FMB27-100	27	100	58	21	M12
BT40-FMB32-100	32	100	78	24	M16
BT40-FMB16-160	16	160	38	17	M8
BT40-FMB22-160	22	160	48	19	M10
BT40-FMB27-160	27	160	58	21	M12
BT40-FMB32-160	32	160	78	24	M16
BT40-FMB40-160	40	160	88	27	M20
BT40-FMB22-200	22	200	48	19	M10
BT40-FMB27-200	27	200	58	21	M12
BT40-FMB32-200	32	200	78	24	M16
BT40-FMB22-250	22	250	48	19	M10
BT40-FMB22-300	22	300	48	19	M10

Face mill holder is with retaining screw (image 2) except China, it is with universal screw (image 1) in China.
 中国市场面铣刀柄标配圆头螺钉 (图 1), 其他国家标配十字花螺钉 (图 2).

AD/B Customized
 AD/B 可定制

Face Mill Holder

面铣刀柄

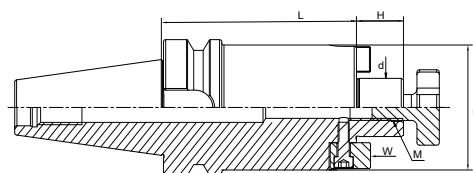

Size	d	L	D	H	M
BT50-FMB16-40	16	40	38	17	M8
BT50-FMB22-40	22	40	48	19	M10
BT50-FMB27-40	27	40	58	21	M12
BT50-FMB32-50	32	50	78	24	M16
BT50-FMB22-60	22	60	48	19	M10
BT50-FMB27-60	27	60	58	21	M12
BT50-FMB32-60	32	60	78	24	M16
BT50-FMB16-100	16	100	38	17	M8
BT50-FMB22-100	22	100	48	19	M10
BT50-FMB27-100	27	100	58	21	M12
BT50-FMB32-100	32	100	78	24	M16
BT50-FMB22-160	22	160	48	19	M10
BT50-FMB27-160	27	160	58	21	M12
BT50-FMB32-160	32	160	78	24	M16
BT50-FMB22-200	22	200	48	19	M10
BT50-FMB27-200	27	200	58	21	M12
BT50-FMB32-200	32	200	78	24	M16
BT50-FMB22-250	22	250	48	19	M10
BT50-FMB27-250	27	250	58	21	M12
BT50-FMB32-250	32	250	78	24	M16
BT50-FMB22-300	22	300	48	19	M10
BT50-FMB27-300	27	300	58	21	M12
BT50-FMB32-300	32	300	78	24	M16
BT50-FMB22-100(D=60)	22	100	60	19	M10
BT50-FMB22-150(D=60)	22	150	60	19	M10
BT50-FMB22-200(D=60)	22	200	60	19	M10
BT50-FMB22-250(D=60)	22	250	60	19	M10
BT50-FMB22-300(D=60)	22	300	60	19	M10





Face mill holder is with retaining screw (image 2) except China, it is with universal screw (image 1) in China.
中国面铣刀柄标配圆头螺钉 (图 1), 其他国家标配十字花螺钉 (图 2).

AD/B Customized

AD/B 可定制

Face Mill Holder

面铣刀柄

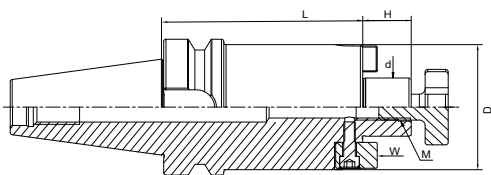

Size	d	L	D	D1	H	M	m
BT40-FMB40-50	40	50	88	66.7	27	M20	M12
BT40-FMB40-60	40	60	88	66.7	27	M20	M12
BT40-FMB40-100	40	100	88	66.7	27	M20	M12
BT40-FMB40-200	40	200	88	66.7	27	M20	M12
BT50-FMB40-50	40	50	88	66.7	27	M20	M12
BT50-FMB40-60	40	60	88	66.7	27	M20	M12
BT50-FMB60-75	60	75	129	101.6	25	M30	M16
BT50-FMB40-100	40	100	88	66.7	27	M20	M12
BT50-FMB40-160	40	160	88	66.7	27	M20	M12
BT50-FMB40-200	40	200	88	66.7	27	M20	M12
BT50-FMB40-250	40	250	88	66.7	27	M20	M12
BT50-FMB40-300	40	300	88	66.7	27	M20	M12

FMB40 tool holder is with one retaining screw (image 2) and 4 cap screws. but it is with one universal screw (image 1) and 4 cap screws in China.

FMB40 刀柄中国市场面铣刀柄标配圆头螺钉 (图 1) 和 4 个内六角螺钉, 其他国家标配十字花螺钉 (图 2) 和 4 个内六角螺钉.

FMB60 tool holder with 4 cap screws only.


FMB60 刀柄标配 4 个内六角螺钉.

AD/B Customized


AD/B 可定制

Combi Shell Mill Holder


混合插入式铣刀柄



DIN6358

 ≤ 0.005 RPM
G6.3/15000

AD

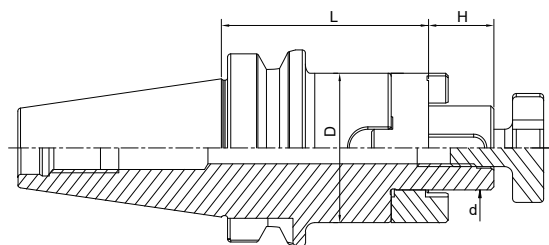


Size	d	D	H	L
BT40-SEMC16-55	16	32	17	55
BT40-SEMC22-55	22	40	19	55
BT40-SEMC27-55	27	48	21	55
BT40-SEMC32-60	32	58	24	60
BT40-SEMC40-60	40	70	27	60
BT40-SEMC16-100	16	32	17	100
BT40-SEMC22-100	22	40	19	100
BT40-SEMC27-100	27	48	21	100
BT40-SEMC32-100	32	58	24	100
BT40-SEMC40-100	40	70	27	100
BT40-SEMC16-160	16	32	17	160
BT40-SEMC22-160	22	40	19	160
BT40-SEMC27-160	27	48	21	160
BT40-SEMC32-160	32	58	24	160
BT40-SEMC40-160	40	70	27	160
BT50-SEMC16-70	16	32	17	70
BT50-SEMC22-70	22	40	19	70
BT50-SEMC27-70	27	48	21	70
BT50-SEMC32-70	32	58	24	70
BT50-SEMC40-70	40	70	27	70
BT50-SEMC16-100	16	32	17	100
BT50-SEMC22-100	22	40	19	100
BT50-SEMC27-100	27	48	21	100
BT50-SEMC32-100	32	58	24	100
BT50-SEMC40-100	40	70	27	100
BT50-SEMC16-160	16	32	17	160
BT50-SEMC22-160	22	40	19	160
BT50-SEMC27-160	27	48	21	160
BT50-SEMC32-160	32	58	24	160
BT50-SEMC40-160	40	70	27	160

End Mill Holder Weldon 侧固刀柄



			
DIN6359/1835B	≤0.005	G6.3/15000	AD

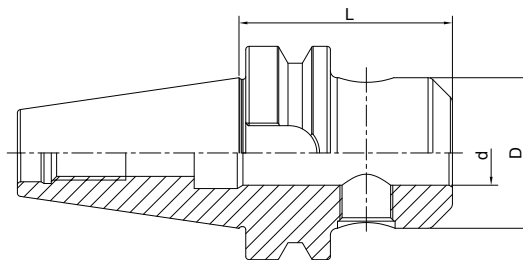

Size	d	D	L	M	Screw Quantity
BT30-SLA06-50	6	25	50	M6	1
BT30-SLA08-50	8	28	50	M8	1
BT30-SLA10-50	10	35	50	M10	1
BT30-SLA12-50	12	42	50	M12	1
BT30-SLA14-50	14	44	50	M12	1
BT30-SLA16-63	16	48	63	M14	1
BT30-SLA18-63	18	50	63	M14	1
BT30-SLA20-63	20	52	63	M16	1
BT30-SLA25-90	25	65	90	M18*2	2
BT40-SLA06-50	6	25	50	M6	1
BT40-SLA08-50	8	28	50	M8	1
BT40-SLA10-63	10	35	63	M10	1
BT40-SLA12-63	12	42	63	M12	1
BT40-SLA14-63	14	44	63	M12	1
BT40-SLA16-63	16	48	63	M14	1
BT40-SLA18-63	18	50	63	M14	1
BT40-SLA20-63	20	52	63	M16	1
BT40-SLA25-90	25	65	90	M18*2	2
BT40-SLA32-100	32	72	100	M20*2	2
BT40-SLA40-120	40	80	120	M20*2	2
BT40-SLA06-100	6	25	100	M6	1
BT40-SLA08-100	8	28	100	M8	1
BT40-SLA10-100	10	35	100	M10	1
BT40-SLA12-100	12	42	100	M12	1
BT40-SLA14-100	14	44	100	M12	1
BT40-SLA16-100	16	48	100	M14	1
BT40-SLA18-100	18	50	100	M14	1
BT40-SLA20-100	20	52	100	M16	1

AD/B Customized


AD/B 可定制

End Mill Holder Weldon

侧固刀柄



			
DIN6359/1835B	A ≤ 0.005	RPM G6.3/15000	AD

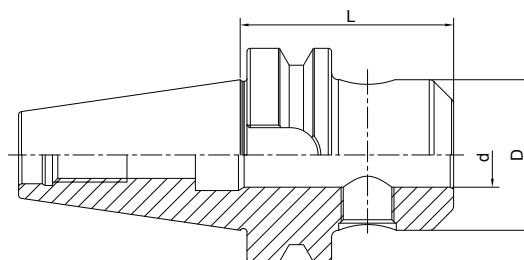


Size	d	D	L	M	Screw Quantity
BT40-SLA06-160	6	25	160	M6	1
BT40-SLA08-160	8	28	160	M8	1
BT40-SLA10-160	10	35	160	M10	1
BT40-SLA12-160	12	42	160	M12	1
BT40-SLA14-160	14	44	160	M12	1
BT40-SLA16-160	16	48	160	M14	1
BT40-SLA18-160	18	50	160	M14	1
BT40-SLA20-160	20	52	160	M16	1
BT40-SLA25-160	25	65	160	M18*2	2
BT40-SLA32-160	32	72	160	M20*2	2
BT40-SLA40-160	40	80	160	M20*2	2
BT50-SLA06-63	6	25	63	M6	1
BT50-SLA08-63	8	28	63	M8	1
BT50-SLA10-63	10	35	63	M10	1
BT50-SLA12-80	12	42	80	M12	1
BT50-SLA14-80	14	44	80	M12	1
BT50-SLA16-80	16	48	80	M14	1
BT50-SLA18-80	18	50	80	M14	1
BT50-SLA20-80	20	52	80	M16	1
BT50-SLA25-100	25	65	100	M18*2	2
BT50-SLA32-105	32	72	105	M20*2	2
BT50-SLA40-110	40	80	110	M20*2	2
BT50-SLA50-125	50	98	125	M24*2	2
BT50-SLA06-160	6	25	160	M6	1
BT50-SLA08-160	8	28	160	M8	1
BT50-SLA10-160	10	35	160	M10	1
BT50-SLA12-160	12	42	160	M12	1
BT50-SLA14-160	14	44	160	M12	1
BT50-SLA16-160	16	48	160	M14	1
BT50-SLA18-160	18	50	160	M14	1
BT50-SLA20-160	20	52	160	M16	1
BT50-SLA25-160	25	65	160	M18*2	2
BT50-SLA32-160	32	72	160	M20*2	2
BT50-SLA40-160	40	80	160	M20*2	2

End Mill Holder with Coolant Channels

侧固刀柄，端面出水型

			
DIN6359/1835B	≤0.005	G6.3/15000	AD

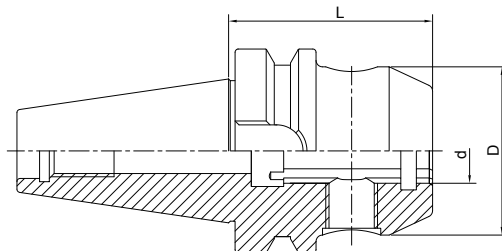

Size	d	D	L	M	Screw Quantity
BT40-SLA06-50K	6	25	50	M6	1
BT40-SLA08-50K	8	28	50	M8	1
BT40-SLA10-63K	10	35	63	M10	1
BT40-SLA12-63K	12	42	63	M12	1
BT40-SLA14-63K	14	44	63	M12	1
BT40-SLA16-63K	16	48	63	M14	1
BT40-SLA18-63K	18	50	63	M14	1
BT40-SLA20-63K	20	52	63	M16	1
BT40-SLA25-90K	25	65	90	M18*2	2
BT40-SLA32-100K	32	72	100	M20*2	2
BT40-SLA40-120K	40	80	120	M20*2	2
BT40-SLA06-100K	6	25	100	M6	1
BT40-SLA08-100K	8	28	100	M8	1
BT40-SLA10-100K	10	35	100	M10	1
BT40-SLA12-100K	12	42	100	M12	1
BT40-SLA14-100K	14	44	100	M12	1
BT40-SLA16-100K	16	48	100	M14	1
BT40-SLA18-100K	18	50	100	M14	1
BT40-SLA20-100K	20	52	100	M16	1


AD/B Customized

AD/B 可定制

End Mill Holder with Coolant Channels

侧固刀柄，端面出水型

			
DIN6359/1835B	≤ 0.005	G6.3/15000	AD

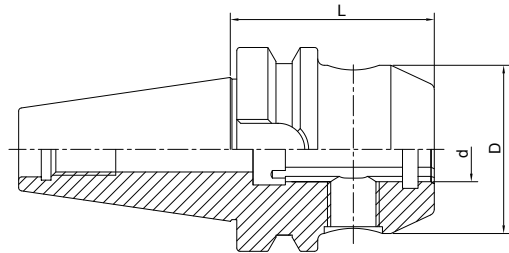

Size	d	D	L	M	Screw Quantity
BT50-SLA06-63K	6	25	63	M6	1
BT50-SLA08-63K	8	28	63	M8	1
BT50-SLA10-63K	10	35	63	M10	1
BT50-SLA12-80K	12	42	80	M12	1
BT50-SLA14-80K	14	44	80	M12	1
BT50-SLA16-80K	16	48	80	M14	1
BT50-SLA18-80K	18	50	80	M14	1
BT50-SLA20-80K	20	52	80	M16	1
BT50-SLA25-100K	25	65	100	M18*2	2
BT50-SLA32-105K	32	72	105	M20*2	2
BT50-SLA40-110K	40	80	110	M20*2	2
BT50-SLA06-100K	6	25	100	M6	1
BT50-SLA08-100K	8	28	100	M8	1
BT50-SLA10-100K	10	35	100	M10	1
BT50-SLA12-100K	12	42	100	M12	1
BT50-SLA14-100K	14	44	100	M12	1
BT50-SLA16-100K	16	48	100	M14	1
BT50-SLA18-100K	18	50	100	M14	1
BT50-SLA20-100K	20	52	100	M16	1




AD/B Customized

AD/B 可定制

BT

End Mill Holder Whistle Notch

侧固式铣刀柄，斜 2 度

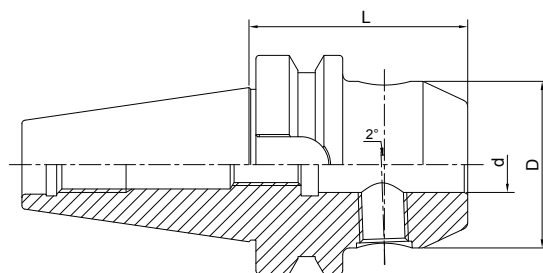




Size	d	D	L	M	Screw Quantity
BT40-SLB06-50	6	25	50	M6	1
BT40-SLB08-50	8	28	50	M8	1
BT40-SLB10-63	10	35	63	M10	1
BT40-SLB12-63	12	42	63	M12	1
BT40-SLB14-63	14	44	63	M12	1
BT40-SLB16-63	16	48	63	M14	1
BT40-SLB18-63	18	50	63	M14	1
BT40-SLB20-63	20	52	63	M16	1
BT40-SLB25-90	25	65	90	M18*2	2
BT40-SLB32-100	32	72	100	M20*2	2
BT40-SLB40-120	40	80	120	M20*2	2
BT50-SLB06-63	6	25	63	M6	1
BT50-SLB08-63	8	28	63	M8	1
BT50-SLB10-63	10	35	63	M10	1
BT50-SLB12-80	12	42	80	M12	1
BT50-SLB14-80	14	44	80	M12	1
BT50-SLB16-80	16	48	80	M14	1
BT50-SLB18-80	18	50	80	M14	1
BT50-SLB20-80	20	52	80	M16	1
BT50-SLB25-100	25	65	100	M18*2	2
BT50-SLB32-105	32	72	105	M20*2	2
BT50-SLB40-110	40	80	110	M20*2	2

AD/B Customized

AD/B 可定制

Morse Taper Adapter with Tang




带扁尾莫氏刀柄

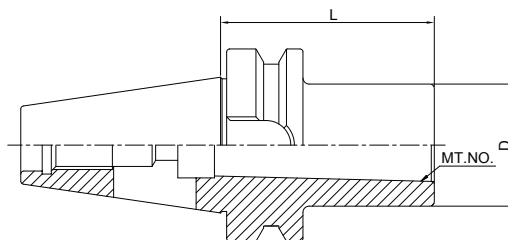

Size	MT.NO.	D	L
BT30-MTA1-45	1	25	45
BT30-MTA2-60	2	32	60
BT30-MTA3-75	3	40	75
BT40-MTA1-50	1	25	50
BT40-MTA2-50	2	32	50
BT40-MTA3-70	3	40	70
BT40-MTA4-95	4	48	95
BT50-MTA1-45	1	25	45
BT50-MTA2-60	2	32	60
BT50-MTA3-65	3	40	65
BT50-MTA3-180	3	40	180
BT50-MTA4-95	4	48	95
BT50-MTA4-180	4	48	180
BT50-MTA5-105	5	63	105

Morse Taper Adapter with Drawbar

带螺纹孔莫氏刀柄

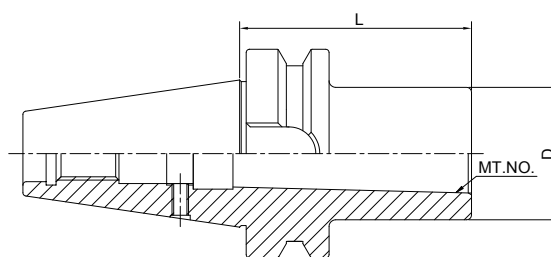


Size	MT.NO.	D	L
BT40-MTB1-50	1	25	50
BT40-MTB2-50	2	32	50
BT40-MTB3-70	3	40	70
BT40-MTB4-95	4	48	95
BT50-MTB1-45	1	25	45
BT50-MTB2-60	2	32	60
BT50-MTB3-65	3	40	65
BT50-MTB4-70	4	48	70
BT50-MTB5-120	5	63	120

Tool Holder Adatper Sleeve 转换刀柄



A ↗	RPM
≤0.005	G6.3/15000

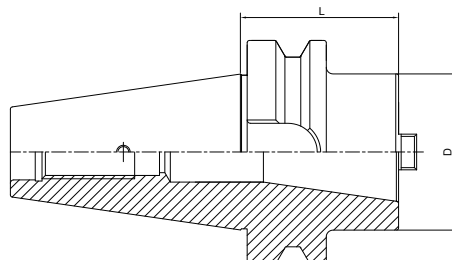


Size	D	L
BT40-BT30-60	63	60
BT40-BT40-100	63	100
BT50-BT40-70	70	70
BT50-BT50-120	97	120

Tool Holder Adatper Sleeve 转换刀柄





A ↗	AD
≤0.005	AD

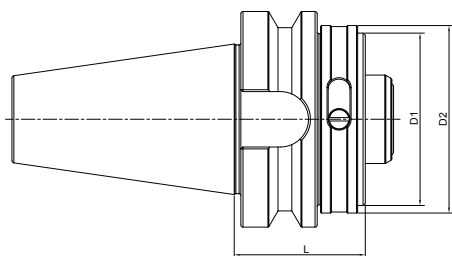

Size	D1	D2	L
BT30-HSK32C-40	32	37	40
BT30-HSK40C-40	40	45	40
BT40-HSK32C-40	32	37	40
BT40-HSK40C-40	40	45	40
BT40-HSK50C-50	50	55	50
BT40-HSK63C-70	63	70	70
BT50-HSK32C-50	32	37	50
BT50-HSK40C-50	40	45	50
BT50-HSK50C-60	50	55	60
BT50-HSK63C-60	63	70	60
BT50-HSK80C-60	80	87	60
BT50-HSK100C-90	100	110	90


Drill Chuck Adapter 钻接杆

 DIN238	 A ≤ 0.005	 RPM G6.3/15000
--	--	---

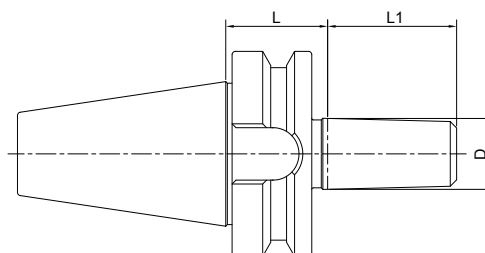

Size	D	L	L1
BT30-B12-25	B12	25	18.5
BT30-B16-25	B16	25	24
BT40-B12-32	B12	32	18.5
BT40-B16-32	B16	32	24
BT40-B18-32	B18	32	32
BT40-B22-32	B22	32	40.5
BT50-B16-45	B16	45	24
BT50-B18-45	B18	45	32
BT50-B22-45	B22	45	40.5

APU Drill Chuck Holder APU 钻夹头刀柄

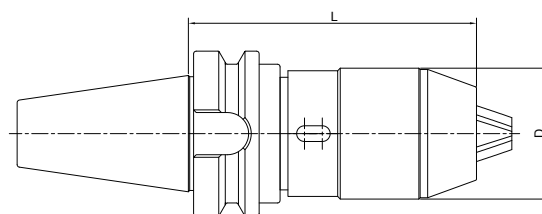

Size	D	L	Capacity
BT30-APU08-80	36	80	1-8
BT30-APU13-110	48	110	1-13
BT40-APU08-85	36	85	1-8
BT40-APU13-105	48	105	1-13
BT40-APU16-110	53	110	3-16
BT50-APU08-90	36	90	1-8
BT50-APU13-105	48	105	1-13
BT50-APU16-115	53	115	3-16


BT

Precision Drill Chuck Holder

精密钻夹头刀柄

A ↗
≤0.03


RPM
G6.3/15000

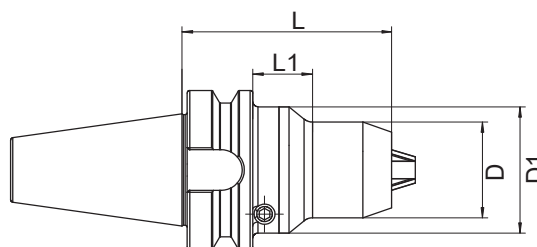

Size	D	D1	L	L1	Capacity
BT30-CPU10-80	38	50	80	26	1-10
BT40-CPU10-80	38	50	80	21	1-10
BT40-CPU13-90	50	-	90	-	1-13
BT40-CPU16-90	50	-	90	-	1-16
BT50-CPU13-100	50	-	100	-	1-13
BT50-CPU16-100	50	-	100	-	1-16

Quick Change Tapping Chuck with Length Compensation

弹性快换攻丝刀柄

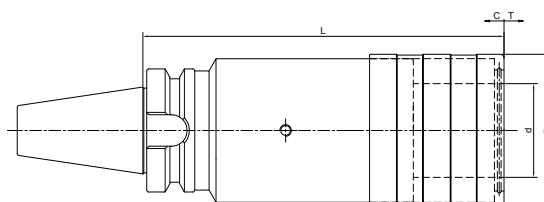


Size	d	D	L	T	C
BT30-TC312-70	19	38	70	7.5	7.5
BT30-TC820-95	31	54	95	12.5	12.5
BT40-TC312-65	19	38	65	7.5	7.5
BT40-TC820-93	31	53	93	12.5	12.5
BT40-TC1433-166	48	78	166	22	22
BT50-TC312-100	19	38	100	7.5	7.5
BT50-TC820-100	31	53	100	12.5	12.5
BT50-TC1433-142	48	78	142	22	22

Screw-in Milling Cutter Holder

锁牙刀柄, 锥柄型



A ↗ ≤0.005	RPM G6.3/15000	AD
---------------	-------------------	----

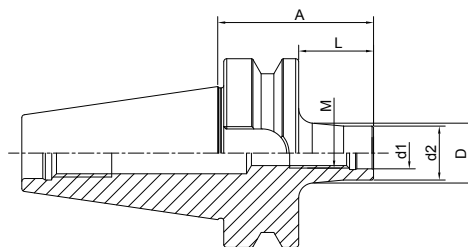

BT


Size	M	d1	d2	A	L	D
BT40-SOM08-52 L=25	8	8.5	14.5	52	25	15
BT40-SOM08-77 L=50	8	8.5	14.5	77	50	23
BT40-SOM08-102 L=75	8	8.5	14.5	102	75	23
BT40-SOM08-127 L=100	8	8.5	14.5	127	100	25
BT40-SOM10-32 L=5	10	10.5	18	32	5	18
BT40-SOM10-52 L=25	10	10.5	18	52	25	20
BT40-SOM10-77 L=50	10	10.5	18	77	50	23
BT40-SOM10-102 L=75	10	10.5	18	102	75	28
BT40-SOM10-127 L=100	10	10.5	18	127	100	32
BT40-SOM10-177 L=150	10	10.5	18	177	150	36.5
BT40-SOM12-32 L=5	12	12.5	21	32	5	21
BT40-SOM12-52 L=25	12	12.5	21	52	25	24
BT40-SOM12-77 L=50	12	12.5	21	77	50	24
BT40-SOM12-102 L=75	12	12.5	21	102	75	31
BT40-SOM12-127 L=100	12	12.5	21	127	100	31
BT40-SOM12-152 L=125	12	12.5	21	152	125	36
BT40-SOM12-177 L=150	12	12.5	21	177	150	38
BT40-SOM16-32 L=5	16	17	29	32	5	29
BT40-SOM16-52 L=25	16	17	29	52	25	29
BT40-SOM16-77 L=50	16	17	29	77	50	34
BT40-SOM16-102 L=75	16	17	29	102	75	34
BT40-SOM16-127 L=100	16	17	29	127	100	36
BT40-SOM16-152 L=125	16	17	29	152	125	40
BT40-SOM16-177 L=150	16	17	29	177	150	42.5
BT50-SOM08-88 L=50	8	8.5	14.5	88	50	23
BT50-SOM08-138 L=100	8	8.5	14.5	138	100	25
BT50-SOM08-188 L=150	8	8.5	14.5	188	150	30
BT50-SOM10-88 L=50	10	10.5	18	88	50	23
BT50-SOM10-138 L=100	10	10.5	18	138	100	32
BT50-SOM10-188 L=150	10	10.5	18	188	150	36.5

Screw-inMilling Cutter Holder

锁牙刀柄，锥柄型



A ↗ ≤0.005	RPM G6.3/15000	 AD
----------------------	--------------------------	--

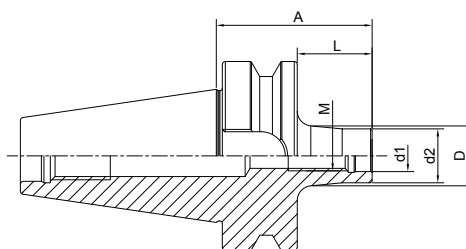


Size	M	d1	d2	A	L	D
BT50-SOM12-88 L=50	12	12.5	21	88	50	24
BT50-SOM12-138 L=100	12	12.5	21	138	100	33
BT50-SOM12-188 L=150	12	12.5	21	188	150	40
BT50-SOM16-88 L=50	16	17	29	88	50	34
BT50-SOM16-138 L=100	16	17	29	138	100	36
BT50-SOM16-188 L=150	16	17	29	188	150	42.5

Screw-in Milling Cutter Holder

锁牙刀柄，直柄型



A ↗ ≤0.005	RPM G6.3/15000	 AD
----------------------	--------------------------	---

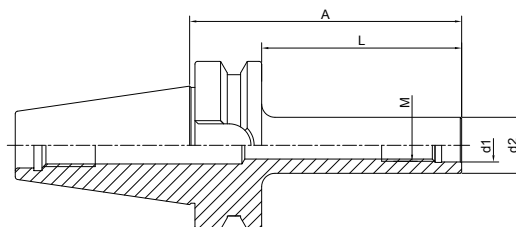

Size	M	d1	d2	A	L
BT40-M10-102 L=75	10	10.5	18	102	75
BT40-M10-127 L=100	10	10.5	18	127	100
BT40-M10-177 L=150	10	10.5	18	177	150
BT40-M12-102 L=75	12	12.5	21	102	75
BT40-M12-127 L=100	12	12.5	21	127	100
BT40-M12-152 L=125	12	12.5	21	152	125
BT40-M12-177 L=150	12	12.5	21	177	150
BT40-M16-102 L=75	16	17	29	102	75
BT40-M16-127 L=100	16	17	29	127	100
BT40-M16-152 L=125	16	17	29	152	125
BT40-M16-177 L=150	16	17	29	177	150
BT50-M10-138 L=100	10	10.5	18	138	100
BT50-M10-188 L=150	10	10.5	18	188	150
BT50-M12-138 L=100	12	12.5	21	138	100
BT50-M12-188 L=150	12	12.5	21	188	150
BT50-M16-138 L=100	16	17	29	138	100
BT50-M16-188 L=150	16	17	29	188	150


Runout Adjustable Flange Adapter

可调节精度法兰刀柄

A ↗
≤0.002

RPM
G2.5/25000

AD

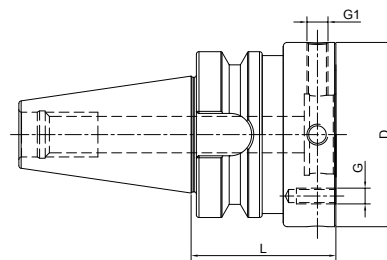

Size	D	L	G	G1
BT30-MOD060-050	60	50	M5	M8x1
BT30-MOD070-050	70	50	M6	M8x1
BT40-MOD060-050	60	50	M5	M8x1
BT40-MOD070-050	70	50	M6	M8x1
BT40-MOD080-050	80	50	M6	M8x1
BT40-MOD100-070	100	70	M8	M10x1
BT50-MOD060-070	60	70	M5	M8x1
BT50-MOD070-070	70	70	M6	M8x1
BT50-MOD080-070	80	70	M6	M8x1
BT50-MOD100-070	100	70	M8	M10x1
BT50-MOD117-080	117	80	M8	M10x1
BT50-MOD140-080	140	80	M10	M10x1


UM Adjustable Tool Holder

UM 调零刀柄

A ↗
≤0.003

RPM
G2.5/25000


AD

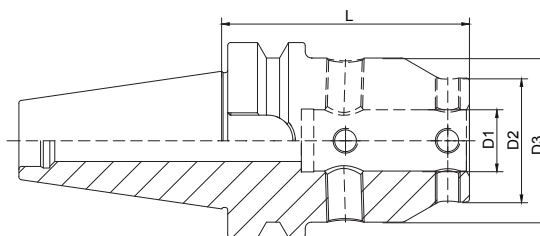

Size	D1	D2	D3	L
BT30-UM12-65	12	28	44.5	65
BT30-UM16-75	16	32	48	75
BT30-UM20-85	20	40	53	85
BT30-UM25-95	25	48	63	95
BT30-UM32-100	32	52	63	100
BT40-UM12-70	12	28	44.5	70
BT40-UM16-70	16	32	48	70
BT40-UM20-80	20	40	53	80
BT40-UM25-100	25	48	63	100
BT40-UM32-95	32	52	63	95
BT50-UM12-80	12	28	44.5	80
BT50-UM16-85	16	32	48	85
BT50-UM20-90	20	40	53	90
BT50-UM25-105	25	48	63	105
BT50-UM32-105	32	52	63	105

Boring Bar Blank

基础柄

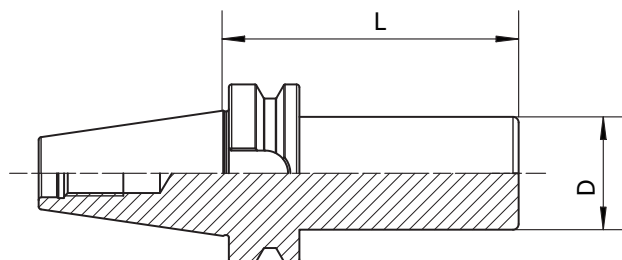


Size	D	L
BT30-D50-160	50	160
BT40-D63-160	63	160
BT40-D63-250	63	250
BT50-D100-160	100	160
BT50-D100-250	100	250

Test Arbor

主轴检测棒


A ↗
≤0.002



Size	D	L
BT30-32-300	32	300
BT40-40-300	40	300
BT50-50-300	50	300

Alignment Tool for ATC Arm

调整机械手用组合模具

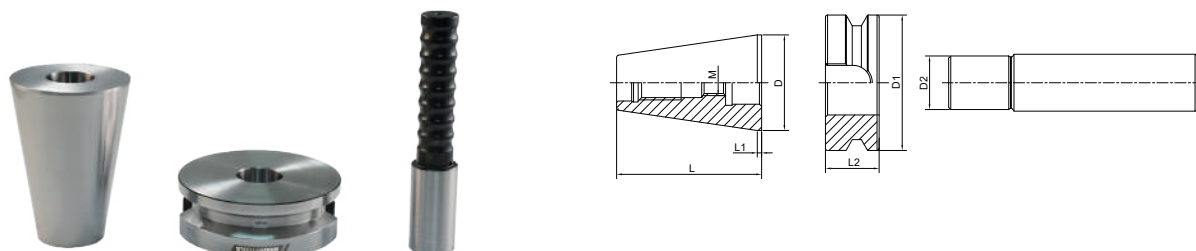

Size	D	D1	D2	L	L1	L2
BT30-ATC-18D	31.75	46	18	50.4	2	20
BT40-ATC-20D	44.45	63	20	67.4	2	25
BT50-ATC-28D	69.85	100	28	104.8	3	35


Usage:

- 1) Put the Taper to the machine Spindle
- 2) Install flange to the ATC arm
- 3) Insert Pin into the flange
- 4) Adjust ATC arm and make sure the pin front part into the flange completely.

BBT

TOOL HOLDERS

BBT DualDrive (Double Contact) Tool Holders

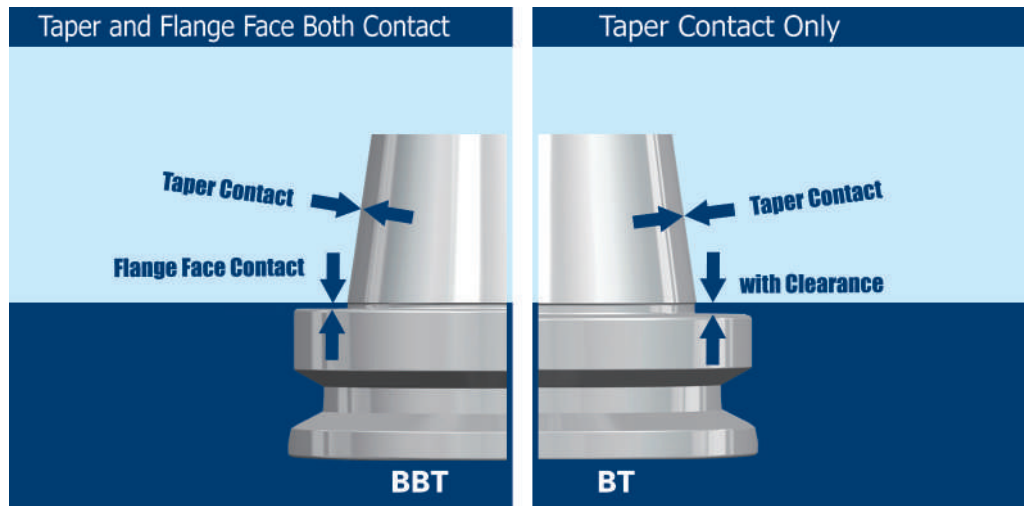


BBT Advantages:

- * Improve tool holder stability when high speed working.
- * Improve workpiece surface finish.
- * Improve working dimension accuracy.
- * Improve ATC repeatability.
- * Improve the roundness when boring operation.
- * Extend cutting tool life.

ORDER SPECIFICATION:
PLEASE ORDER BBT SPINDLE FOR BETTER PERFORMANCE.

BBT 双接触刀柄

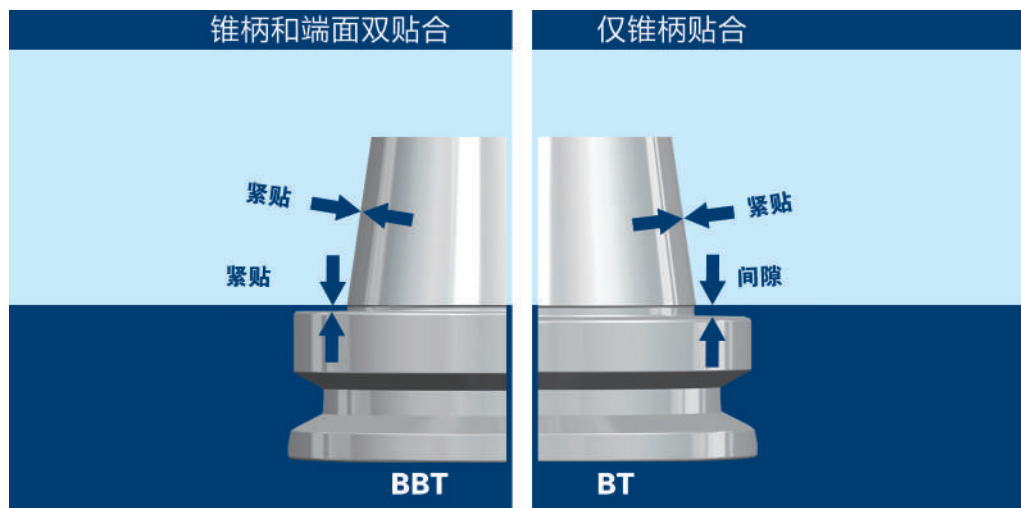

使用 BBT 双接触刀柄优势：




- * 高速加工时提高刀柄稳定性；
- * 提高工件表面光洁度；
- * 提高加工精度；
- * 提高 ATC 的重复精度；
- * 提高镗孔加工圆度；
- * 增加刀具使用寿命。

订购说明：

为了更好的使用效果，请订购带 BBT 主轴的加工中心。

BBT Taper Standard

BBT 锥柄标准



Size	D	d1	d2	d3	d4	d5	d6	l1	l2	l3	l4	a	T
BBT30	46	31.75	56.14	38	12.5	16.1	8	70.4	48.4	24	21	1	M12*1.75
BBT40	63	44.45	75.679	53	17	16.1	10	92.4	65.4	30	26	1	M16*2.0
BBT50	100	69.85	119.019	85	25	25.7	15	139.8	101.8	45	36.5	1.5	M24*3.0

Taper standard: JIS B 6339

Material: Alloyed case hardened steel

Surface Treatment: Blackening and Bright

Taper tolerance: <AT3

Hardness: HRC 56-60

Carbon depth: 0.8±0.2mm

Surface Roughness: Ra<0.2µm

Balancing: G6.3/15000; G2.5/25000

Cooling: AD; AD/B can be made by request.

BBT TOOLING SYSTEM




BBT 工具系统

ER Collet Chuck.....	C.40
ER 弹簧夹头刀柄.....	C.40
Power Milling Chuck	C.42
强力铣刀柄.....	C.42
SKS Collet Chuck.....	C.43
SKS 高速筒夹刀柄.....	C.43
Face Mill Holder.....	C.44
面铣刀柄	C.44
Combi Shell Mill Holder.....	C.46
混合插入式铣刀柄.....	C.46
End Mill Holder.....	C.47
侧固刀柄.....	C.47
Morse Taper Adapter.....	C.48
带扁尾莫氏刀柄.....	C.48
Tool Holder Adatper Sleeve	C.48
转换刀柄.....	C.48
Precision Drill Chuck Holder.....	C.49
精密钻夹头刀柄.....	C.49
Runout Adjustable Flange Adapter	C.49
可调节精度法兰刀柄.....	C.49
Test Arbor.....	C.50
主轴检测棒.....	C.50



ER Collet Chuck with UM Nut




ER 弹簧夹头刀柄

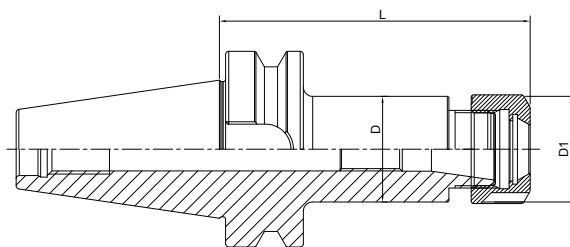

Size	D	D1	L	Capacity
BBT40-ER16UM-70	28	32	70	1-10
BBT40-ER20UM-70	34	35	70	1-13
BBT40-ER25-70	42	42	70	2-16
BBT40-ER32-70	50	50	70	2-20
BBT40-ER40-80	50	63	80	3-26
BBT40-ER16UM-100	28	32	100	1-10
BBT40-ER20UM-100	34	35	100	1-13
BBT40-ER25-100	42	42	100	2-16
BBT40-ER32-100	50	50	100	2-20
BBT40-ER40-100	50	63	100	3-26
BBT40-ER16UM-160	28	32	160	1-10
BBT40-ER20UM-160	34	35	160	1-13
BBT40-ER25-160	42	42	160	2-16
BBT40-ER32-160	50	50	160	2-20
BBT40-ER40-160	50	63	160	3-26
BBT50-ER16UM-70	28	32	70	1-10
BBT50-ER20UM-70	34	35	70	1-13
BBT50-ER25-70	42	42	70	2-16
BBT50-ER32-70	40	50	70	2-20
BBT50-ER40-80	63	63	80	3-26
BBT50-ER50-100	64	78	100	6-34
BBT50-ER16UM-100	28	32	100	1-10
BBT50-ER20UM-100	34	35	100	1-13
BBT50-ER25-100	42	42	100	2-16
BBT50-ER32-100	50	50	100	2-20
BBT50-ER40-100	63	63	100	3-26
BBT50-ER16UM-160	28	32	160	1-10
BBT50-ER20UM-160	34	35	160	1-13
BBT50-ER25-160	42	42	160	2-16
BBT50-ER32-160	50	50	160	2-20
BBT50-ER40-160	63	63	160	3-26

ER Collet Chuck with Hex Nut



ER 弹簧夹头刀柄

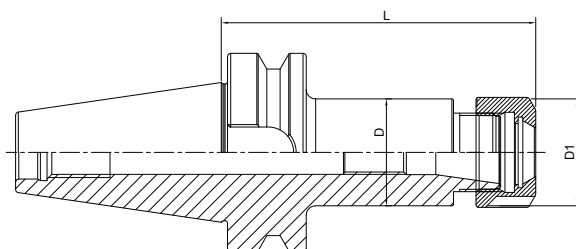

Size	D	D1	L	Capacity
BBT40-ER16-70	28	28	70	1-10
BBT40-ER20-70	34	34	70	1-13
BBT40-ER16-100	28	28	100	1-10
BBT40-ER20-100	34	34	100	1-13
BBT40-ER16-160	28	28	160	1-10
BBT40-ER20-160	34	34	160	1-13
BBT50-ER16-70	28	28	70	1-10
BBT50-ER20-70	34	34	70	1-13
BBT50-ER16-100	28	28	100	1-10
BBT50-ER20-100	34	34	100	1-13
BBT50-ER16-160	28	28	160	1-10
BBT50-ER20-160	34	34	160	1-13

ER Collet Chuck with Mini Nut

ER 弹簧夹头刀柄

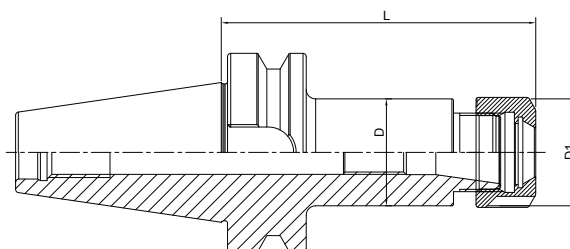


Size	D	D1	L	Capacity
BBT40-ER11M-70	16	16	70	1-7
BBT40-ER16M-70	22	22	70	1-10
BBT40-ER20M-70	28	28	70	1-13
BBT40-ER25M-70	35	35	70	2-16
BBT40-ER11M-100	16	16	100	1-7
BBT40-ER16M-100	22	22	100	1-10
BBT40-ER20M-100	28	28	100	1-13
BBT40-ER25M-100	35	35	100	2-16
BBT40-ER11M-160T	16	16	160	1-7
BBT40-ER16M-160T	22	22	160	1-10
BBT40-ER20M-160	28	28	160	1-13
BBT40-ER25M-160	35	35	160	2-16

T refers to cutter side with taper design

T 代表刀具端锥柄设计

Power Milling Chuck

强力铣刀柄

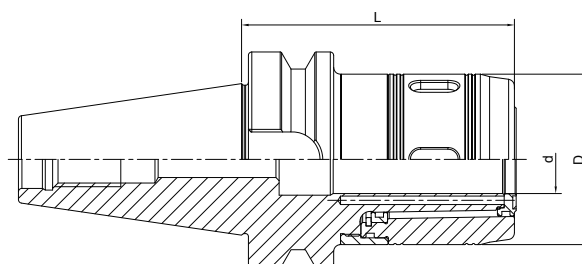

Size	d	D	L	Capacity
BBT40-HC20-90	20	50	90	3-16; 20
BBT40-HC25-100	25	59	100	3-20; 25
BBT40-HC32-105	32	72	105	3-25; 32
BBT50-HC20-105	20	50	105	3-16; 20
BBT50-HC25-105	25	59	105	3-20; 25
BBT50-HC32-110	32	72	110	3-25; 32


High Speed SKS Collet Chuck

SKS 高速筒夹刀柄

A ↗
≤0.003

RPM
G2.5/25000




AD
AD

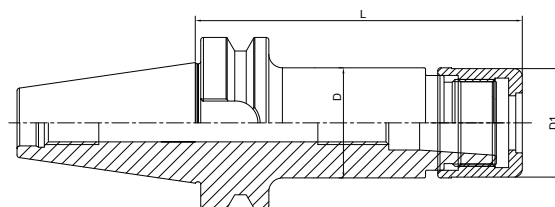

Size	D	D1	L	Capacity	M
BBT40-SKS10-90	27.5	27.1	90	2-10	M21.5*1
BBT40-SKS16-90	40.6	40	90	3-16	M32*1.5
BBT40-SKS20-90	48.5	48	90	2-20	M40*1
BBT40-SKS25-90	55.6	55	90	6-25	M45*1.5
BBT40-SKS10-120	27.5	27.1	120	2-10	M21.5*1
BBT40-SKS16-120	40.6	40	120	3-16	M32*1.5
BBT40-SKS20-120	48.5	48	120	2-20	M40*1
BBT40-SKS25-120	55.6	55	120	6-25	M45*1.5

Face Mill Holder

面铣刀柄

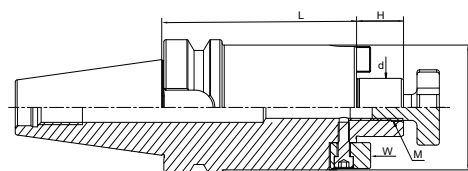




Size	d	L	D	H	M
BBT40-FMB16-40	16	40	38	17	M8
BBT40-FMB22-40	22	40	48	19	M10
BBT40-FMB27-40	27	40	58	21	M12
BBT40-FMB32-50	32	50	78	24	M16
BBT40-FMB22-60	22	60	48	19	M10
BBT40-FMB27-60	27	60	58	21	M12
BBT40-FMB32-60	32	60	78	24	M16
BBT40-FMB16-100	16	100	38	17	M8
BBT40-FMB22-100	22	100	48	19	M10
BBT40-FMB27-100	27	100	58	21	M12
BBT40-FMB32-100	32	100	78	24	M16
BBT50-FMB16-40	16	40	38	17	M8
BBT50-FMB22-40	22	40	48	19	M10
BBT50-FMB27-40	27	40	58	21	M12
BBT50-FMB32-50	32	50	78	24	M16
BBT50-FMB22-60	22	60	48	19	M10
BBT50-FMB27-60	27	60	58	21	M12
BBT50-FMB32-60	32	60	78	24	M16
BBT50-FMB16-100	16	100	38	17	M8
BBT50-FMB22-100	22	100	48	19	M10
BBT50-FMB27-100	27	100	58	21	M12
BBT50-FMB32-100	32	100	78	24	M16
BBT50-FMB22-160	22	160	48	19	M10
BBT50-FMB27-160	27	160	58	21	M12
BBT50-FMB32-160	32	160	78	24	M16

Face mill holder is with retaining screw (image 2) except China, it is with universal screw (image 1) in China.
中国面铣刀柄标配圆头螺钉 (图 1), 其他国家标配十字花螺钉 (图 2)。

Face Mill Holder

面铣刀柄

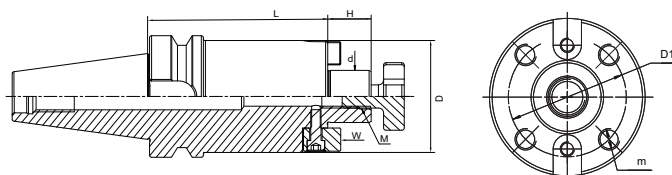


Size	d	L	D	D1	H	M	m
BBT40-FMB40-50	40	50	88	66.7	27	M20	M12
BBT40-FMB40-100	40	100	88	66.7	27	M20	M12
BBT50-FMB40-50	40	50	88	66.7	27	M20	M12
BBT50-FMB40-100	40	100	88	66.7	27	M20	M12



FMB40 tool holder is with one retaining screw (image 2) and 4 cap screws. but it is with one universal screw (image 1) and 4 cap screws in China.

FMB40 刀柄中国市场面铣刀柄标配圆头螺钉 (图 1) 和 4 个内六角螺钉, 其他国家标配十字花螺钉 (图 2) 和 4 个内六角螺钉.

Combi Shell Mill Holder

混合插入式铣刀柄



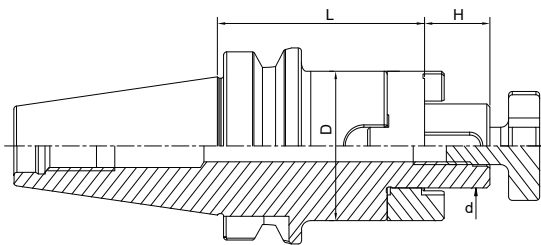
Size	d	D	H	L
BBT40-SEMC16-55	16	32	17	55
BBT40-SEMC22-55	22	40	19	55
BBT40-SEMC27-55	27	48	21	55
BBT40-SEMC32-60	32	58	24	60
BBT40-SEMC40-60	40	70	27	60
BBT40-SEMC16-100	16	32	17	100
BBT40-SEMC22-100	22	40	19	100
BBT40-SEMC27-100	27	48	21	100
BBT40-SEMC32-100	32	58	24	100
BBT40-SEMC40-100	40	70	27	100
BBT40-SEMC16-160	16	32	17	160
BBT40-SEMC22-160	22	40	19	160
BBT40-SEMC27-160	27	48	21	160
BBT40-SEMC32-160	32	58	24	160
BBT40-SEMC40-160	40	70	27	160
BBT50-SEMC16-70	16	32	17	70
BBT50-SEMC22-70	22	40	19	70
BBT50-SEMC27-70	27	48	21	70
BBT50-SEMC32-70	32	58	24	70
BBT50-SEMC40-70	40	70	27	70
BBT50-SEMC16-100	16	32	17	100
BBT50-SEMC22-100	22	40	19	100
BBT50-SEMC27-100	27	48	21	100
BBT50-SEMC32-100	32	58	24	100
BBT50-SEMC40-100	40	70	27	100
BBT50-SEMC16-160	16	32	17	160
BBT50-SEMC22-160	22	40	19	160
BBT50-SEMC27-160	27	48	21	160
BBT50-SEMC32-160	32	58	24	160
BBT50-SEMC40-160	40	70	27	160

End Mill Holder Weldon

侧固刀柄






			
DIN6359/1835B	A $\nearrow$ ≤ 0.005	RPM G2.5/25000	AD

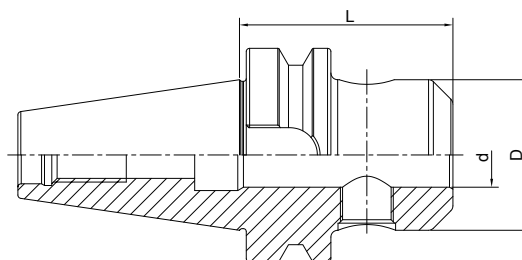

Size	d	D	L	M	Screw Quantity
BBT40-SLA06-50	6	25	50	M6	1
BBT40-SLA08-50	8	28	50	M8	1
BBT40-SLA10-63	10	35	63	M10	1
BBT40-SLA12-63	12	42	63	M12	1
BBT40-SLA14-63	14	44	63	M12	1
BBT40-SLA16-63	16	48	63	M14	1
BBT40-SLA18-63	18	50	63	M14	1
BBT40-SLA20-63	20	52	63	M16	1
BBT40-SLA25-90	25	65	90	M18*2	2
BBT40-SLA32-100	32	72	100	M20*2	2
BBT40-SLA40-120	40	80	120	M20*2	2
BBT40-SLA06-100	6	25	100	M6	1
BBT40-SLA08-100	8	28	100	M8	1
BBT40-SLA10-100	10	35	100	M10	1
BBT40-SLA12-100	12	42	100	M12	1
BBT40-SLA14-100	14	44	100	M12	1
BBT40-SLA16-100	16	48	100	M14	1
BBT40-SLA18-100	18	50	100	M14	1
BBT40-SLA20-100	20	52	100	M16	1
BBT50-SLA06-63	6	25	63	M6	1
BBT50-SLA08-63	8	28	63	M8	1
BBT50-SLA10-63	10	35	63	M10	1
BBT50-SLA12-80	12	42	80	M12	1
BBT50-SLA14-80	14	44	80	M12	1
BBT50-SLA16-80	16	48	80	M14	1
BBT50-SLA18-80	18	50	80	M14	1
BBT50-SLA20-80	20	52	80	M16	1
BBT50-SLA25-100	25	65	100	M18*2	2
BBT50-SLA32-105	32	72	105	M20*2	2
BBT50-SLA40-110	40	80	110	M20*2	2
BBT50-SLA50-125	50	98	125	M24*2	2

Morse Taper Adapter with Tang


带扁尾莫氏刀柄

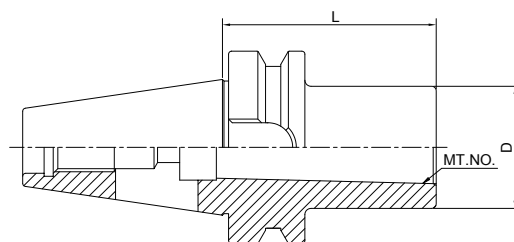

Size	MT.NO.	D	L
BBT40-MTA1-50	1	25	50
BBT40-MTA2-50	2	32	50
BBT40-MTA3-70	3	40	70
BBT40-MTA4-95	4	48	95
BBT50-MTA1-45	1	25	45
BBT50-MTA2-60	2	32	60
BBT50-MTA3-65	3	40	65
BBT50-MTA4-95	4	48	95

Tool Holder Adapter Sleeve

转换刀柄

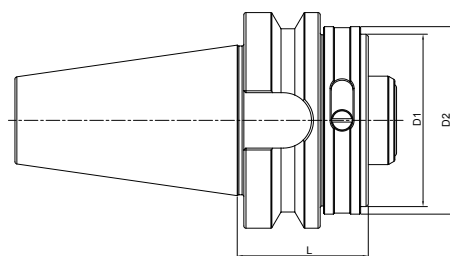


Size	D1	D2	L
BBT40-HSK63C-70	63	70	70
BBT50-HSK63C-60	63	70	60
BBT50-HSK100C-90	100	110	90

Precision Drill Chuck Holder

精密钻夹头刀柄

A ↗ ≤0.03	RPM G2.5/25000	AD
--------------	-------------------	----

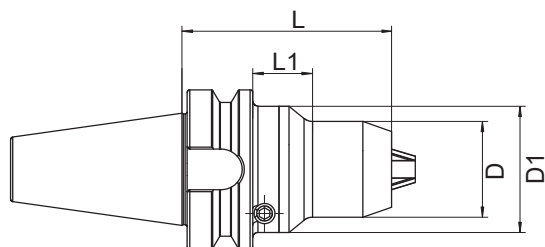


Size	D	D1	L	L1	Capacity
BBT40-CPU10-80	38	50	80	21	1-10
BBT40-CPU13-90	50	-	90	-	1-13
BBT40-CPU16-90	50	-	90	-	1-16
BBT50-CPU13-100	50	-	100	-	1-13
BBT50-CPU16-100	50	-	100	-	1-16

Runout Adjustable Flange Adapter

可调节精度法兰刀柄


A ↗ ≤0.002	RPM G2.5/25000	AD
---------------	-------------------	----

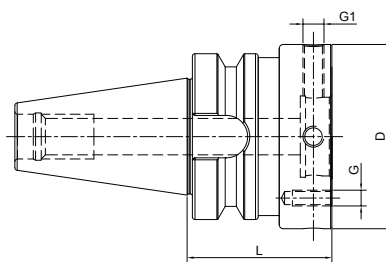

Size	D	L	G	G1
BBT40-MOD060-050	60	50	M5	M8x1
BBT40-MOD070-050	70	50	M6	M8x1
BBT40-MOD080-050	80	50	M6	M8x1
BBT40-MOD100-070	100	70	M8	M10x1
BBT50-MOD060-070	60	70	M5	M8x1
BBT50-MOD070-070	70	70	M6	M8x1
BBT50-MOD080-070	80	70	M6	M8x1
BBT50-MOD100-070	100	70	M8	M10x1
BBT50-MOD117-080	117	80	M8	M10x1
BBT50-MOD140-080	140	80	M10	M10x1

Test Arbor 主轴检测棒

A ↗
≤0.002



Size	D	L
BBT30-32-300	32	300
BBT40-40-300	40	300
BBT50-50-300	50	300



BBT

NBT

TOOL HOLDERS

NBT Taper Standard

NBT 锥柄标准

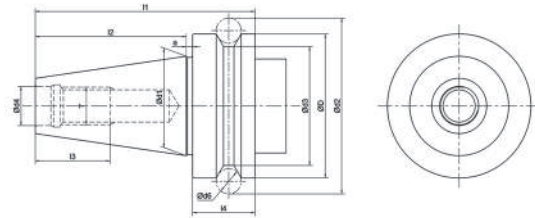


Size	D	d1	d2	d3	d4	d5	d6	l1	l2	l3	l4	a	T
NBT30	46	31.75	56.144	38	12.5	16.1	8	70.4	48.4	24	20	2	M12×1.75
NBT40	63	44.45	75.679	53	17	16.1	10	92.4	65.4	30	25	2	M16×2.0
NBT50	100	69.85	119.019	85	25	25.7	15	139.8	101.8	45	35	3	M24×3.0

Material: Alloyed case hardened steel
Surface Treatment: Blackening and Bright
Taper tolerance: <AT3
Hardness: HRC 56-60
Carbon depth: 0.8±0.2mm
Surface Roughness: Ra<0.2μm
Balancing: G2.5/25000
Cooling: AD

ER Collet Chuck


ER 弹簧夹头刀柄




DIN6499



≤0.003

RPM
G2.5/25000


AD

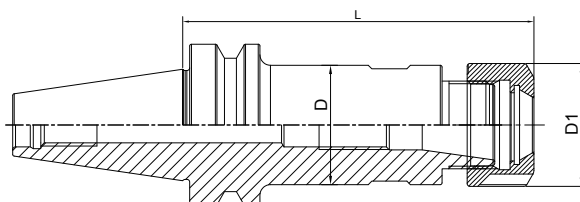

Size	D	D1	L	Capacity
NBT30-ER25-70	42	42	70	2-16
NBT30-ER32-70	50	50	70	2-20
NBT40-ER25-70	42	42	70	2-16
NBT40-ER32-70	50	50	70	2-20

ER Collet Chuck


ER 弹簧夹头刀柄




DIN6499



≤0.003

RPM
G2.5/25000

AD

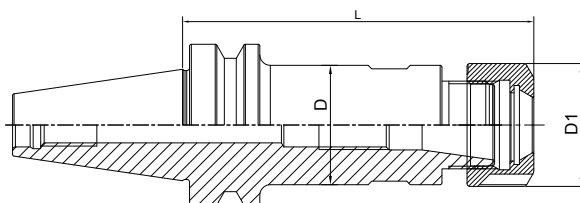

Size	D	D1	L	Capacity
NBT30-ER16-60	28	28	60	1-10
NBT30-ER20-60	34	34	60	1-13
NBT40-ER16-70	28	28	70	1-10
NBT40-ER20-70	34	34	70	1-13


High Speed SKS Collet Chuck

SKS 高速筒夹刀柄

A ↗
≤0.003

RPM
G2.5/25000

AD

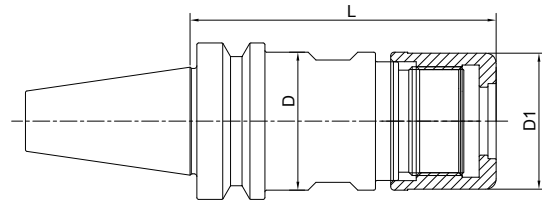

Size	D	D1	L	Capacity	M
NBT30-SKS10-60	27.5	27.1	60	3-10	M21.5*1.0
NBT30-SKS16-60	40.6	40	60	4-16	M32*1.5